

## AreaLux- A.CB.0E0ST

### ControlBox

**Replaces:**


: 2200W Metal Halide

**Applications:**

Industrial, Warehousing &amp; Distribution as well as General installations

**Warranty (Yrs.)**

5

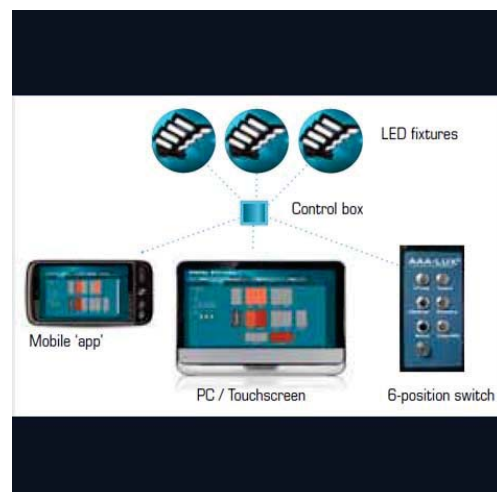

In a dynamic lighting system, AAA-LUX offers a user-friendly interface for both athletes as well as administrators/managers. The wireless system allows remote control of the lighting and control system either manually or automatically.

The simplest control is a 6-position switch. LED luminaires can also be operated by touch screen, mobile phone or PC. This wireless remote dynamic system allows adjustments to be made at any time. User data from the control system and fixtures can also be stored for use by the installer or administrator of the sports facilities.

IP Rating	65
System Power (W)	0
System efficacy (Lm/W)	0
Input Voltage (V)	370 -430 V AC
Input frequency (Hz)	50/60
Power Factor (cos phi)	>
Operating temp. (°C)	10 ~ 40
Storage temp. (°C)	0 ~40
Weight (gr)	
Dimensions (mm): LxWxH	0x 0x 0

Beam Angle (°FWHM)	
Flux (Lm)	0
CRI (Ra4)	0
CCT (K)	
Life Expectancy (Hrs.)	0
Lx @ 1m	
2m	
3m	
Illuminated area (m)@ 1m	
2m	
3m	