

DesignLite range with DL.CLS.RG.20W



Revo—Architectural Gallery Track Light

Replaces:

: 35W Metal Halide; 100W Halogen

Applications:

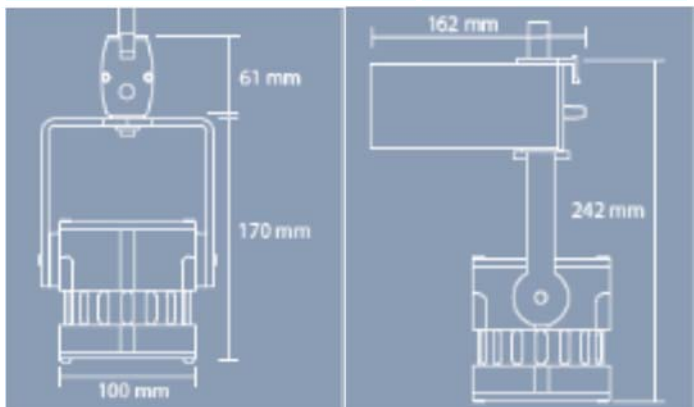
Museums, Galleries, Architectural Illumination

Warranty (Yrs.)

3



- Each fixture can be dimmed individually
- Significant savings on energy- and maintenance costs. With a power consumption of max. 20 Watts, the REVO Gallery replaces halogen light sources of 100W and HQI fixtures up to 70 Watts.
- Global 3-phase trackrail adapter included.
- Adjustable beam angle due to interchangeable
- lenses varying from 8° to 54°.
- Various LED colour combinations possible. Designers can now work with colour combinations for lighting specific objects such as clothing, art and jewellery.
- Built for the future. Due to interchangeable LEDs, lenses and power supplies, the REVO Gallery can be easily adapted to future developments.
- The REVO Gallery is the ultimate choice for use in museums and art galleries.

Finish	Anodised AL: Clear & Black	Beam Angle (°FWHM)	8, 12, 30, 54, 12x46
IP Rating	40	Flux (Lm)	Up to 1800lm adjustable
System Power (W)	20	CRI (Ra4)	85
Input Voltage (V)	200—277 V AC	CCT (K)	2700K - 6300K R, G, B, A
Input frequency (Hz)	50/60	Life Expectancy (Hrs.)	50,000
Power Factor (cos phi)	>0.95		
Operating temp. (°C)	10 ~ 40		
Storage temp. (°C)	0 ~40		
Weight (gr)	2000		
Dimensions (mm): LxWxH	130x 100 x 170		